

GSM

Chair in Communication Systems
Department of Applied Sciences
University of Freiburg
2011

Albert-Ludwigs-Universität Freiburg



**UNI
FREIBURG**

Dennis Wehrle, Konrad Meier

Overview




1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
4. Security
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

1. GSM Infrastructure




- GSM is a cellular network
- Largest mobile network world wide
- Subscriber view:
 - Mobile Station
 - Cell phone
 - SIM card
 - Base Station Transceiver (BTS)
 - Provides access to the network over the air interface
 - Different frequency bands
GSM 850, EGSM 900, DCS 1800, PCS 1900

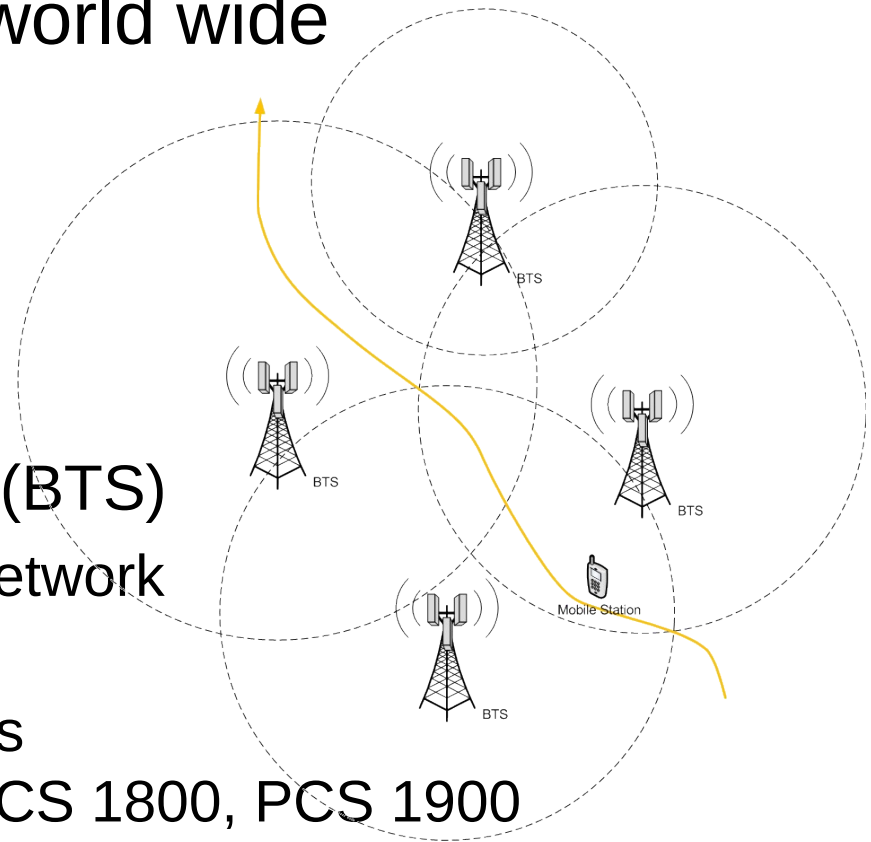

1. GSM Infrastructure



■ Operator / Network view

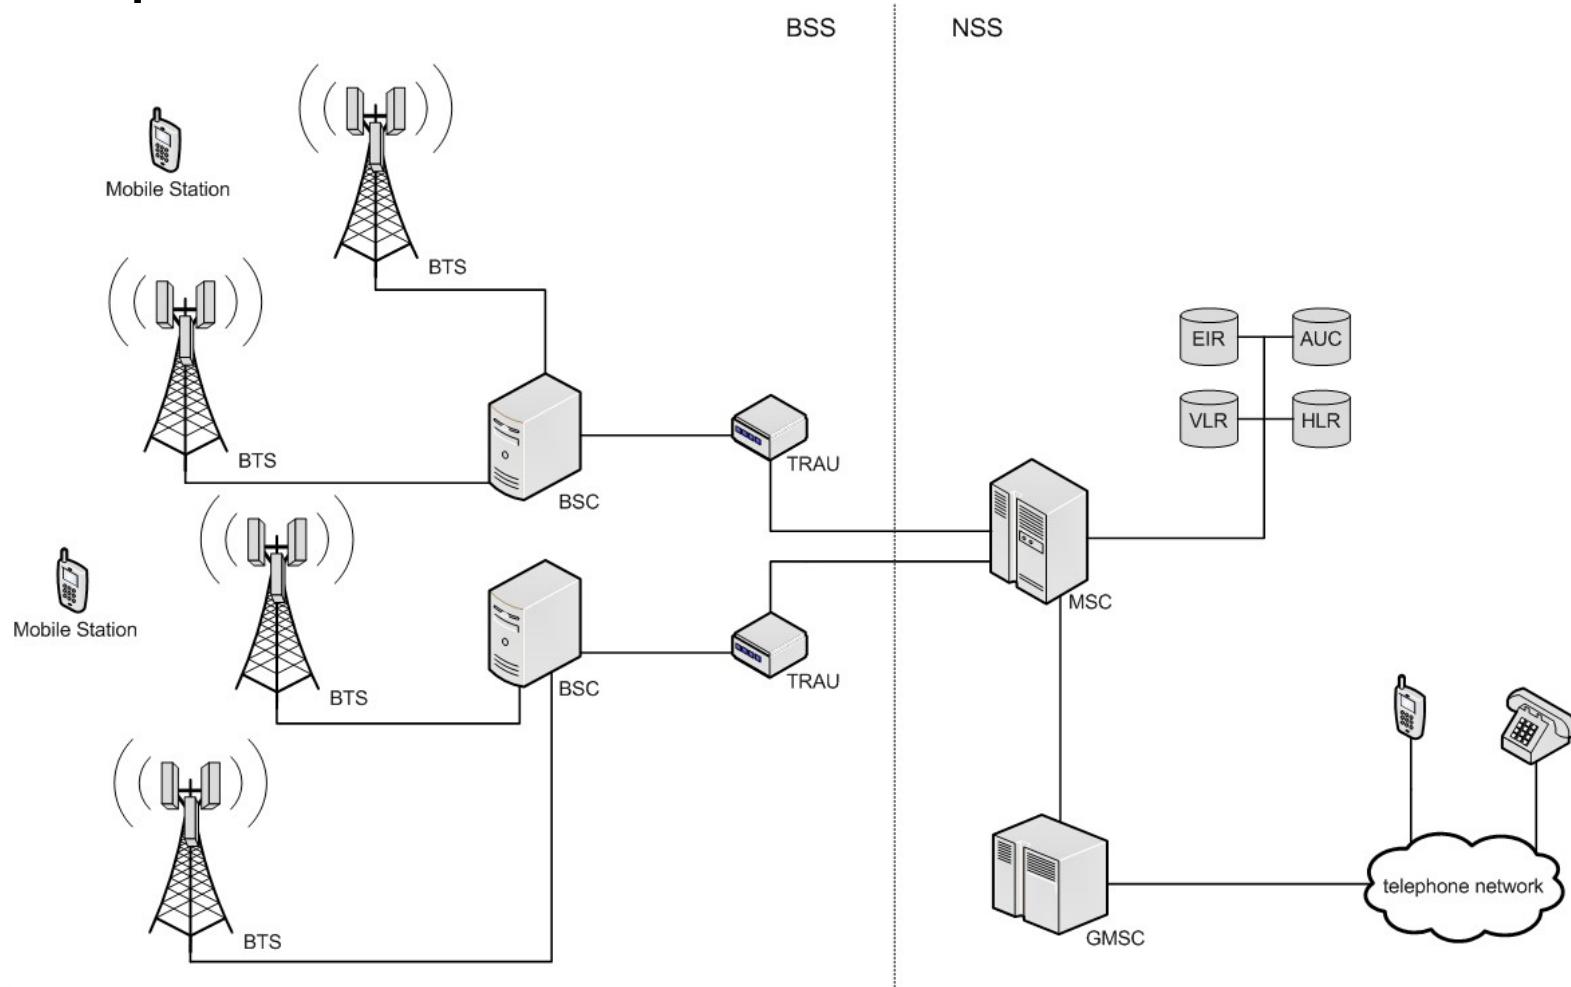

Overview



1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
4. Security
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

2. GSM Analysis



- Analysis from the subscriber point of view
 - Nokia 3310
 - Netmonitor to show network parameters and cell phone state
 - Gammu^[1] captures data received and transmitted by the phone.
 - USRP^[2]
 - Flexible software radio
 - GSM signals can be captured.
 - Data processing is done with airprobe.^[3]



Nokia 3310



Universal Software Radio Peripheral (USRP)

[1] Gammu: <http://wammu.eu/gammu/>

[2] USRP from Ettus Research: <http://www.ettus.com>

[3] airprobe: <https://svn.berlin.ccc.de/projects/airprobe/>

2. GSM Analysis




- Gammu output displayed with Wireshark
- Nokia 3310 Netmonitor

No.	Time	Source	Destination	Protocol	Info
16	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
17	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
18	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
19	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
20	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
21	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
22	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
23	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
24	0	BTS	Broadcast	GSM Um	(DTAP) (RR) System Information Type 4
25	0	BTS	Broadcast	GSM Um	
26	0	BTS	Broadcast	GSM Um	
27	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
28	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
29	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
30	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
31	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1
32	0	BTS	Broadcast	GSM Um	(DTAP) (RR) Paging Request Type 1

Frame 20 (23 bytes on wire, 23 bytes captured)
GSM Um Interface
GSM A-I/F DTAP - Paging Request Type 1
Protocol Discriminator: Radio Resources Management messages
DTAP Radio Resources Management Message Type: Paging Request Type 1 (0x21)
Page Mode
Channel Needed
..00 = Channel 1: Any channel (0)
00.. = Channel 2: Any channel (0)
Mobile Identity - Mobile Identity 1 - IMSI (262073978408619)
Length: 8
0010 : Identity Digit 1: 2
.... 1... = Odd/even indication: Odd number of identity digits (1)
.... .001 = Mobile Identity Type: IMSI (1)
BCD Digits: 262073978408619

IMSI (gsm_a.imsi), 7 bytes Packets: 137 Displayed: 137 Marked: 0 Profile: Default

paging request with IMSI

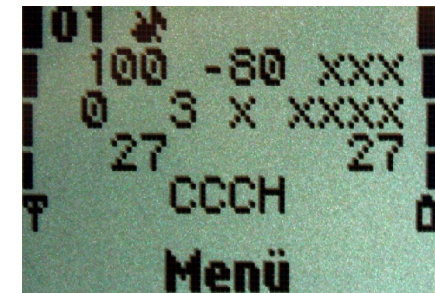

cell parameters



neighborhood list

2. GSM Analysis



- Analysis from the provider point of view
 - Access to a real-world GSM network is hard to get.
 - Therefore we have set up our own GSM network called RZ-GSM.
 - Research network for:
 - “Playing” with the GSM topic in a meaningful way
 - Statistics about user behavior within the network
 - Positioning of Mobile Station
 - GSM encryption A5/1
 - What information can/will be gathered by the provider?
 - How to protect the user in a GSM network?

Overview



1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
4. Security
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

3. Our own GSM network



- GSM network: RZ-GSM
 - Software:
 - OpenBSC^[1]:
Open-Source software implementation of a GSM Base Station Controller
 - LCR^[2]
 - Asterisk^[3]
Voice communication server for routing the calls
 - Hardware
 - ip.access NanoBTS
 - Small GSM picocell



ip.access nanoBTS

[1] OpenBSC: <http://openbsc.osmocom.org>

[2] LCR: <http://www.linux-call-router.de/>

[3] Asterisk: <http://www.asterisk.org/>

3. Our own GSM network

■ GSM network: RZ-GSM

Some facts:

3 BTS


1 BSC

MSC => Asterisk

Databases => SQL

Connection to:

- SIP
- ISDN
- mobile networks
- fixed networks

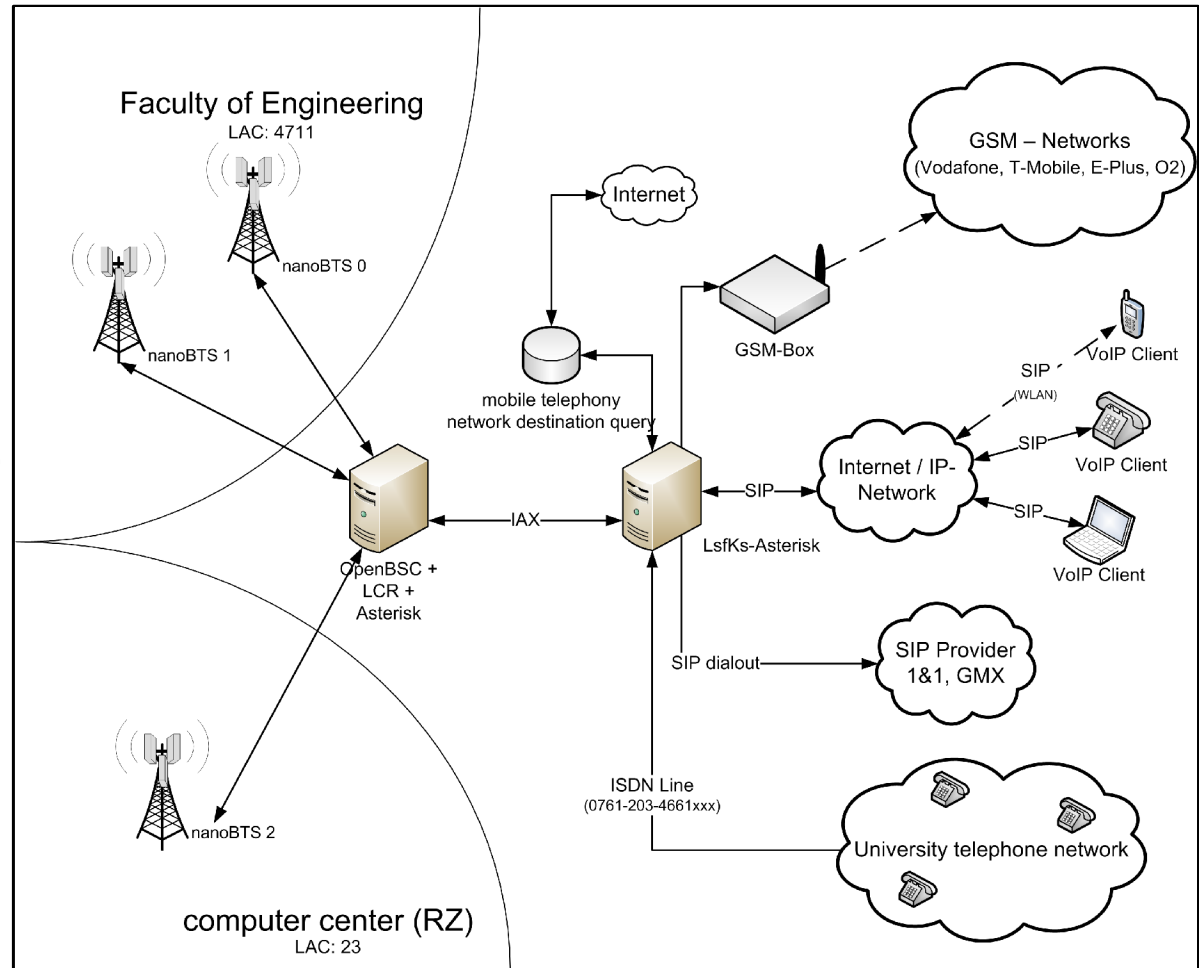

3. Our own GSM network

■ Measuring the received signal strength

Can we use this data to calculate the position of a subscriber?

- How precise is it?
- Comparison of different approaches
- Ongoing research




received signal strength at the faculty site


3. Our own GSM network



- Statistics about the network
1.2.2011 to 9.3.2011

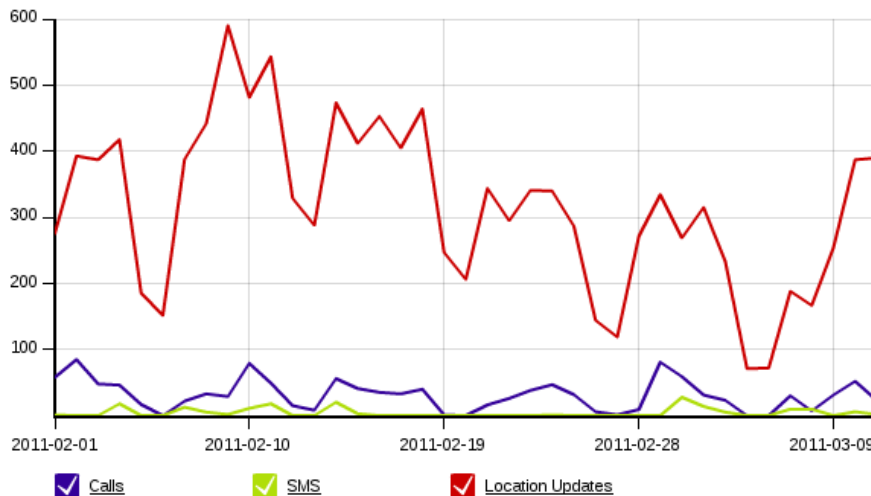

number of calls, SMS and location updates

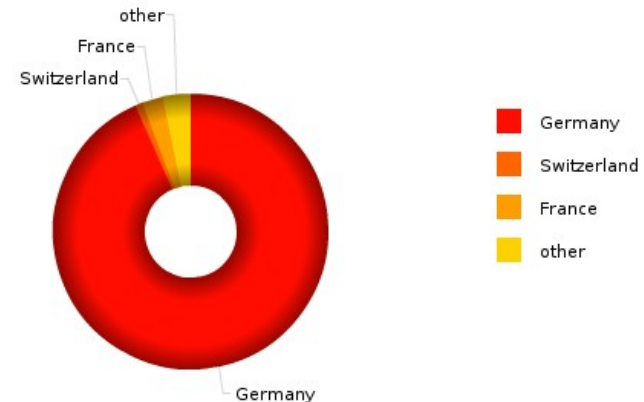


origin of the subscribers

3. Our own GSM network



- Statistics about the network
1.2.2011 to 9.3.2011

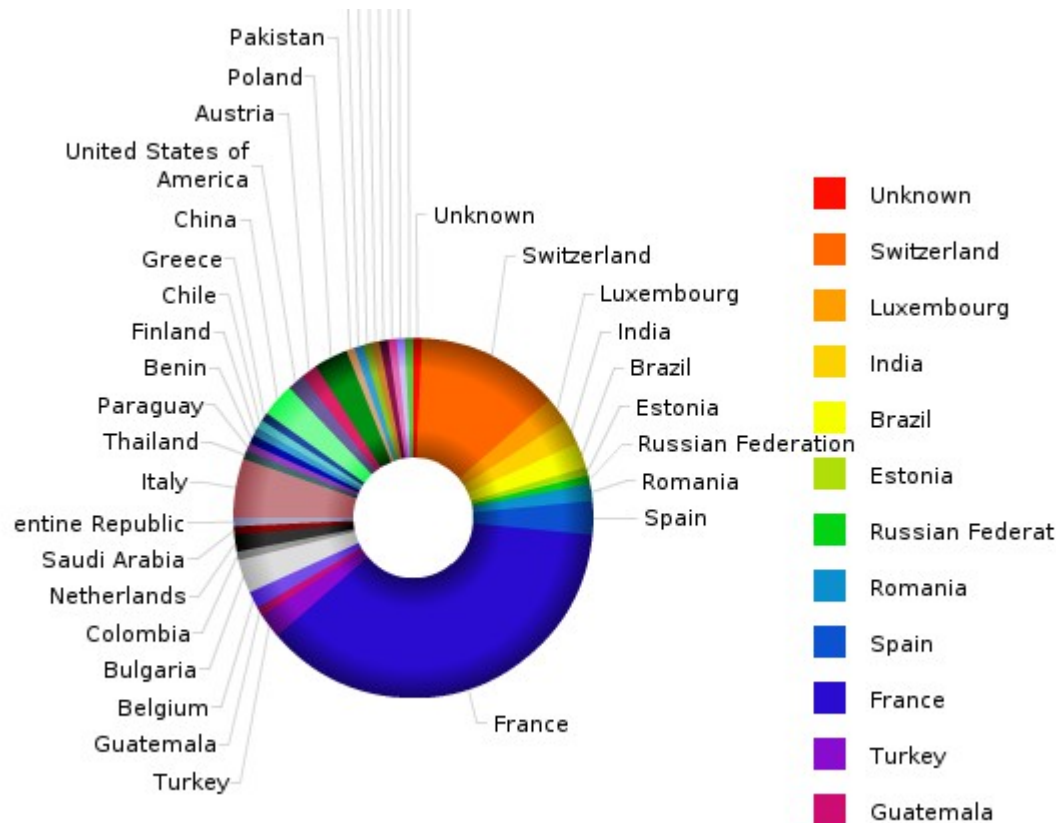

subscribers without Germany

Overview



1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
4. Security
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

4. Security on GSM



- Original intention:
 - Anonymization of subscribers (usage of temporary identifier TMSI)
 - Prevention of eavesdropping (encryption)
- Through the lack of computing power and suitable hardware for analysis, GSM was "secure" for a long time.
- But by now there exists several hardware components and software projects that can be used to analyze, crack and build up GSM networks.

4. Security on GSM




- Problems:
 - No physical access needed for attackers (e.g. cable-based communication)
 - Radio waves spread with less/no control.
 - Much information is not encrypted during transmission.

4.1 Localization in GSM



- Why is it necessary to know the position?
 - Subscribers are moving
 - The network has to know approximate position in order to deliver calls or SMS.
 - Security reasons
 - In case of emergency / prosecution
 - Charging / Services
 - Use the position for charging different fees (e.g. home zone)
 - Information-based
 - Where is the next restaurant?
 - Position-based
 - Business aspects (tracking cargo)

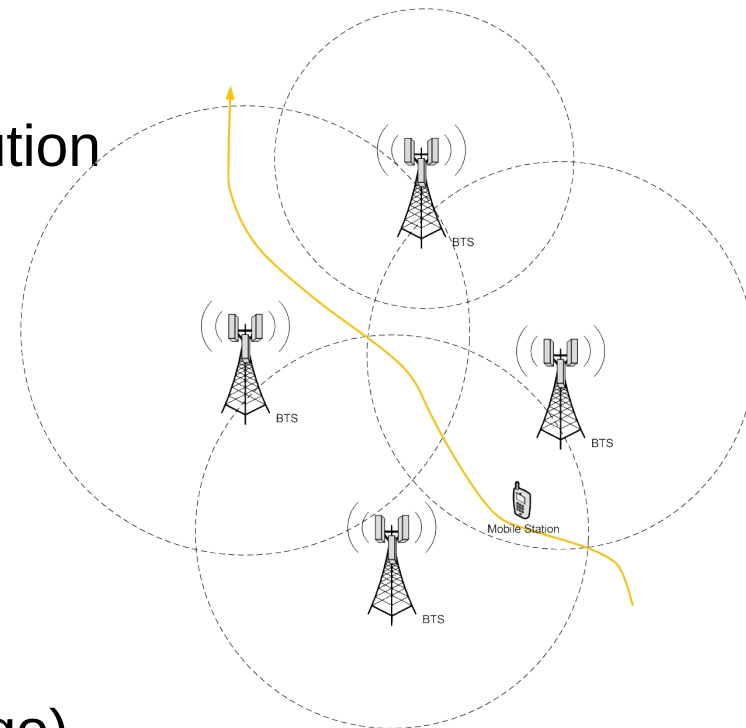

4.1 Localization in GSM



- Accuracy: Depends on the density of the network
 - City: up to a few (hundred) meters
 - Rural area: up to several kilometers
 - Improvement: Combination with GPS
- How does it work?
 - Depends on the service provider
 - HLR lookup of the last known position
 - Active lookup by sending silent SMS to get the current position
- Problem:
 - Misuse of the data
 - It is not clear what happens with the data:
 - e.g.: The Austria provider A1 sells anonymized data

4.1 Example: Localization in GSM



Overview



1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
- 4. Security**
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

4.2 IMSI-Catcher



- IMSI:
 - Worldwide unique identifier for the SIM
 - Stored on the SIM
- IMEI:
 - Worldwide unique identifier for the Mobile Station
- IMSI-Catcher:
 - May only be used by public authorities (in Germany)
 - Price is really high (> \$100 000 Rohde & Schwarz)
 - But with USRP you can build a cheap one (~ \$1500).
- Problems:
 - Identity of the user can be revealed
 - Record conversation
 - Produce a moving profile

4.2 IMSI-Catcher




- How does it work?
 - Simulates a base station as part of a regular mobile radio network (in Germany: D1, D2, E-Plus, O2)
 - During the login procedure the Mobile Station transmits the IMSI / IMEI.
- This is successful because GSM doesn't provide mutual authentication. Only the Mobile Stations have to authenticate correctly.


4.2 IMSI-Catcher



'Standard' IMSI-Catcher:

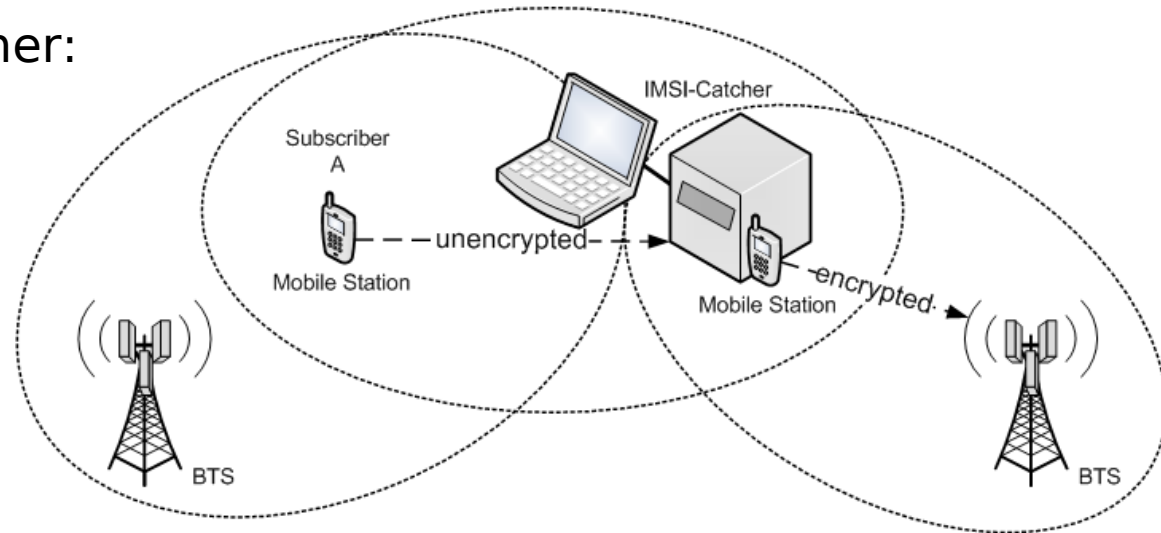

Open Source IMSI-Catcher:

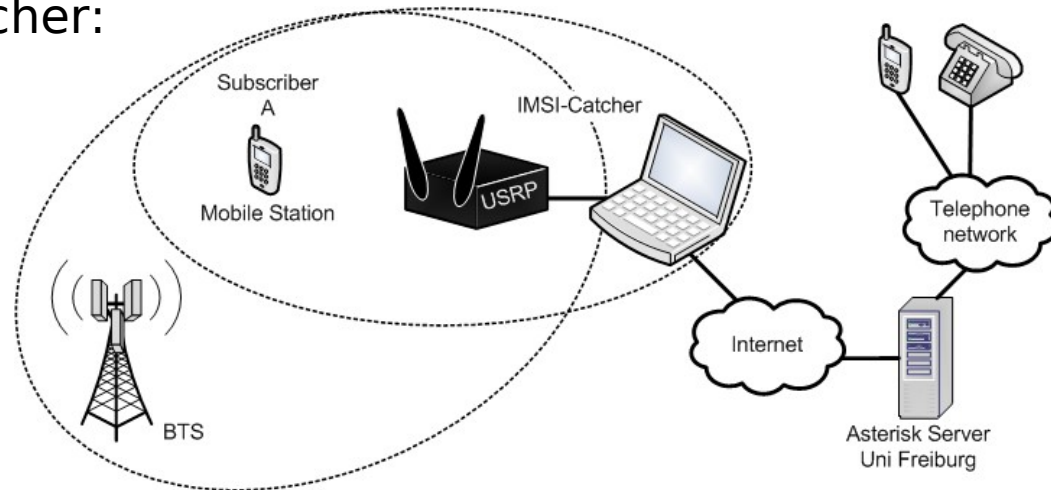

4.2 Login to IMSI-Catcher




- How to induce the Mobile Station to switch to the IMSI-Catcher?
- Mobile Station:
 - Stores the last used frequency on SIM.
 - Don't scan the whole frequency-band if it has a connection.
 - Try to stay in the formerly used network.
 - Use the neighborhood list to scan for proper BTS.
- Problem:
 - If the IMSI-Catcher isn't on the neighborhood list, it will not be recognized.
- Solutions:
 - Force the Mobile Station to switch to the IMSI-Catcher.
 - Use a GSM-Jammer to induce the Mobile Station to rescan the frequency-band

4.2 Login to IMSI-Catcher



Forcing the Mobile Station to switch to the IMSI-Catcher:

1. Mobile Station listens to BTS1
 - BTS1: Transmits list of neighbors
2. Neighborhood-Measurement
3. Turn IMSI-Catcher on
 - Fake BTS4, which has the worst receiving signal strength.
 - MS believes that the signal strength of BTS4 is now better than the signal strength of BTS1.
4. MS switch to IMSI-Catcher.

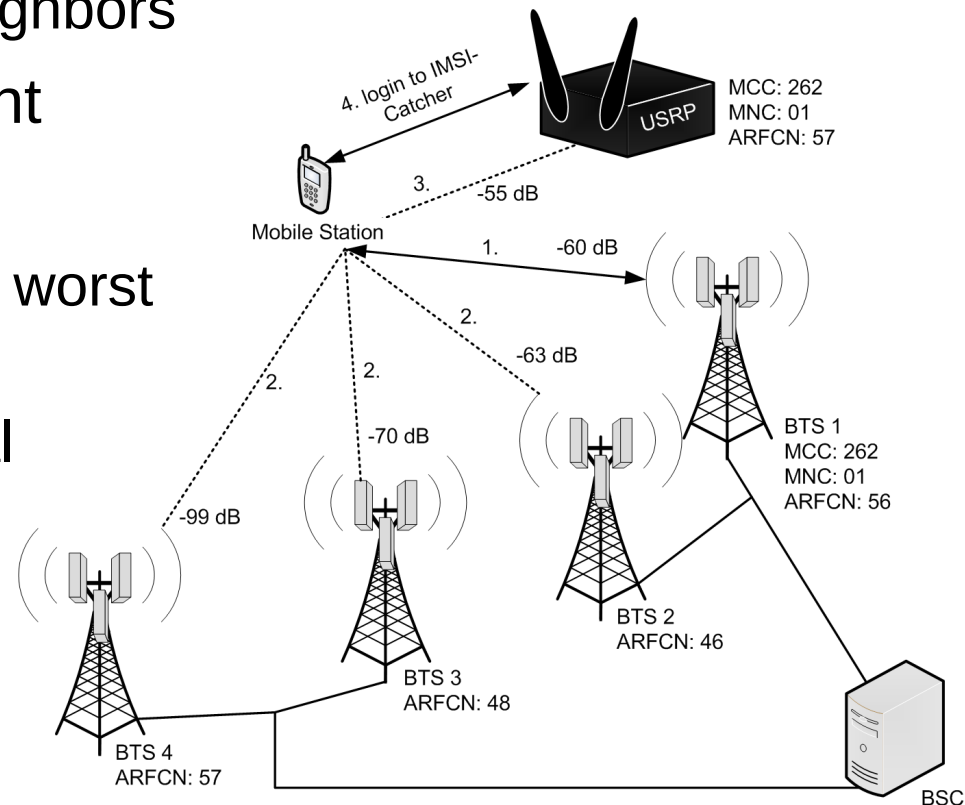

4.2 Protection against IMSI-Catchers




- „Catching“ IMSI:
 - No protection against catching the IMSI
 - Mobile phone can not differentiate between the “visible” radio cells
- Normally the user should be notified of the use of an unencrypted network.
But:
 - Modern devices do not display if the connection is secure or not.
 - Notification about unencrypted connections can be disabled via a flag on the SIM card.
- Solution: Use cryptographic enabled mobile phones with an end-to-end encryption.

4.2 Protection against IMSI-Catchers



- Is it sufficient to use UMTS Mobile Stations for protection?
No!:
 - A fall-back-to-GSM-function exists if there is no surrounding UMTS network available.
=> UMTS-Jammer
 - It is theoretically possible to build a UMTS-IMSI-Catcher

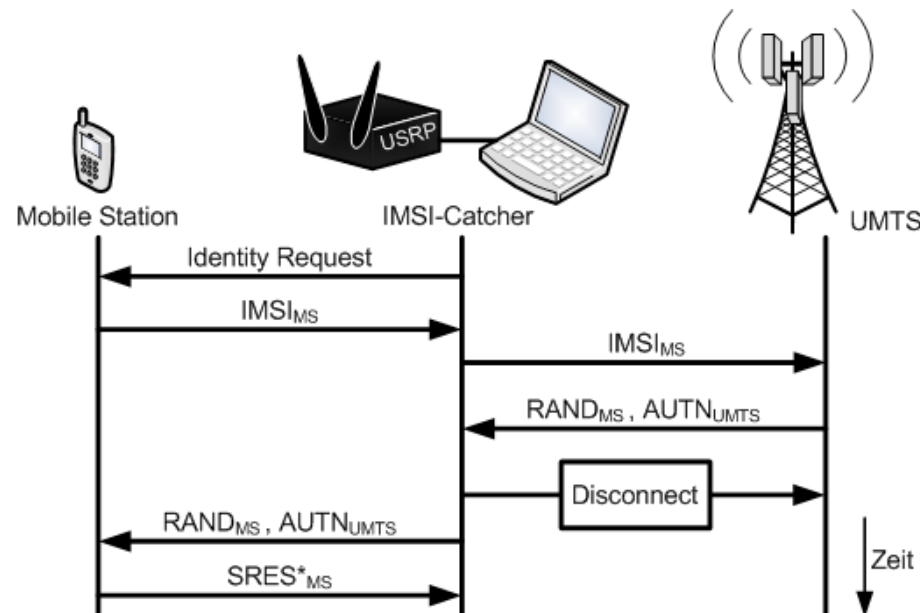

Overview



1. GSM Infrastructure
2. Analysis of GSM
3. Our own GSM network
4. Security
 - 4.1 Localization
 - 4.2 IMSI-Catcher
 - 4.3 Encryption A5/1

4.3 Encryption A5/1




- Content of the communication is encrypted (speech data, SMS)
- Three GSM encryption standards:
 - A5/0: no encryption. Should not be used.
 - A5/1: “strongest” encryption. Currently used.
 - A5/2: weak encryption. No longer used.
- Encryption Algorithm A5/1 developed in 1987
 - Only 64 Bit Key
 - Security by Obscurity
 - General Design leaked in 1994, fully reverse engineered in 1999


4.3 Encryption A5/1



- Session key K_c is calculated from private key K_i and random number RAND

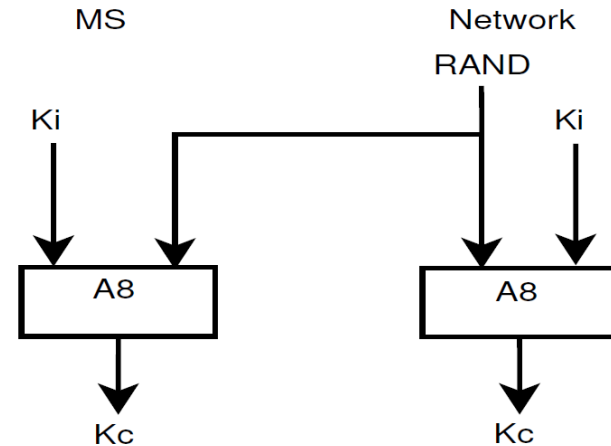

- K_c is used to encrypt plaintext:

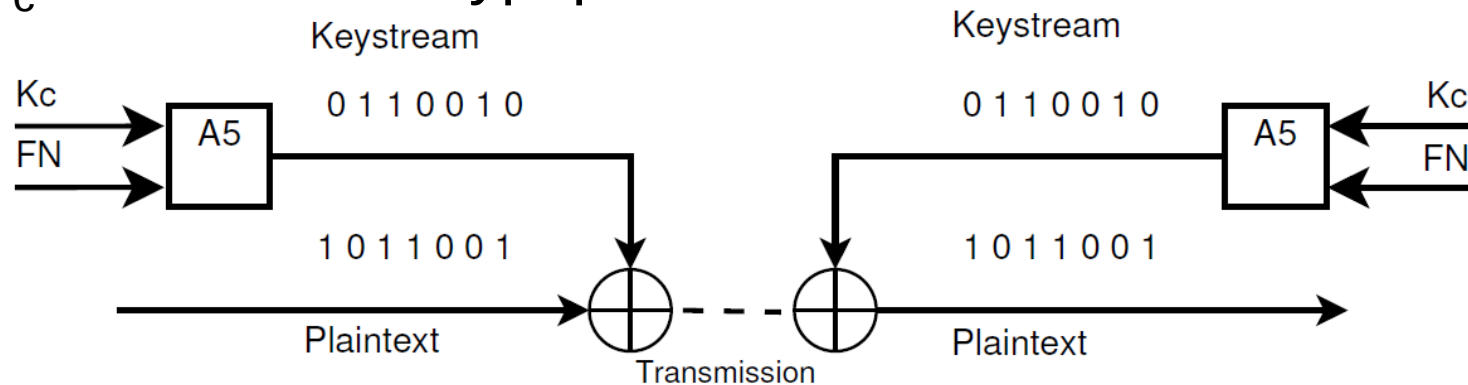

4.3 Encryption A5/1



- Problem:
 - Algorithm is too old and not longer save.
 - Key space can be reduced
 - With today's computing power the encryption can be broken in seconds by using rainbow tables.
 - Interception of GSM signals is no longer a problem.
 - USRP
 - Motorola C123 with OsmocomBB^[1]



[1] OsmocomBB: <http://bb.osmocom.org/>

Motorola C123

4.3 Encryption A5/1



- Rainbow Tables
 - Size 1.7 TB
 - Calculated with ATI graphic cards.
 - Available on the Internet via bittorrent.
- Attack is based on known plaintext
 - Some signaling messages are known both unencrypted and encrypted.
 - Session key K_c can be calculated in seconds.
 - Private key K_i can not be calculated with this attack. But this is not necessary to decode the encrypted data.

4.3 Encryption A5/1



- GSM encryption is no longer secure
- **BUT:** More and more devices are using GSM to transmit data.
 - Mobile TAN for online banking:
TAN transmitted via SMS
 - Vending machines:
Information about the fill level
 - Railway GSM:
Information about the status of the train
 - Smart meter:
Information about the electricity consumption
- Is this really a good idea?